

## Schottky Surface Mount Flat Bridge Rectifier

### Features

- Low profile package
- Ideal for automated placement
- Ultrafast reverse recovery time
- Low power losses, high efficiency
- 

### PINNING



PIN	DESCRIPTION
1	Input Pin ( ~ )
2	Input Pin ( ~ )
3	Output Anode ( + )
4	Output Cathode ( - )

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

**RATINGS AND CHARACTERISTICS CURVES** (TA = 25 °C unless otherwise noted)

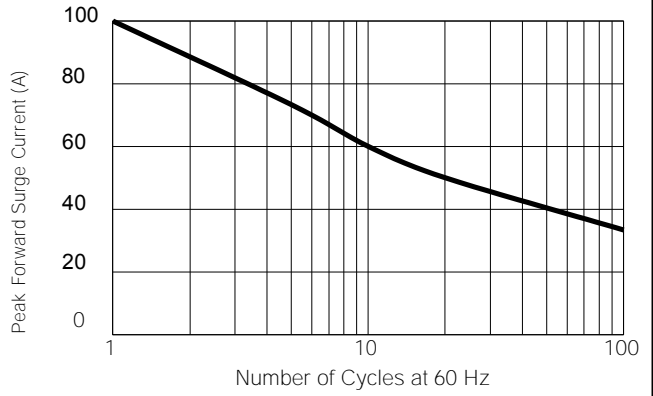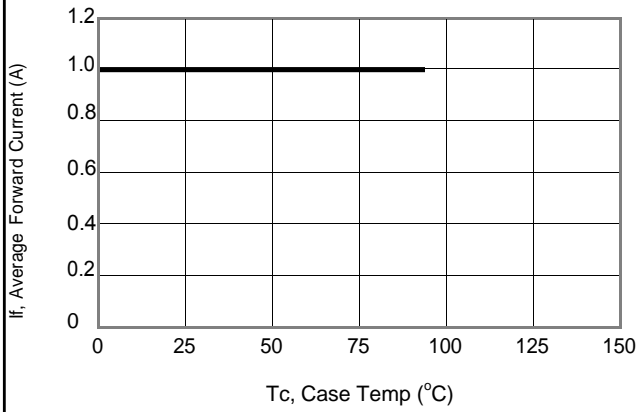

10000 2g28 c 22-eW-38cg2[1]-re063(0)31(0)-re(0) -6.614 57.3056 1(1000m 5

