

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD  
TSA /



Cathode  Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDURGDWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡ )UHHZKHHLRGLJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXPHSHVSHUNYHYURQW DJH		9550		9
0D[LXPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRUZDURSUHQW VLQRDHLQZDYH VXSHULPSURDCHVRSGLRGH		,)60		\$
2SHUDMXQRDURQWRUDJH WHPSHUDW		XUH76D°C	JH WR	f&
7\SLFDO WIKHURVDOHFJ		'2 \$'	5\$-&	f& :
,QVWDQWDQHRROWRUJZDUG SHGLRGH	,) \$	7- f&	7<3	0\$;
	,) \$	7- f&		
	,) \$	7- f&		
	,) \$	7- f&		
,QVWDQWDQHRXUUSHOMRQW UDWHYHYURQW DJH	7- f&	,5		X\$
	7- f&			X\$


1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH


3XOVH WHVW 3XOPH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES 7 \$

f & X Q O H V Q R W K B U Z L V H

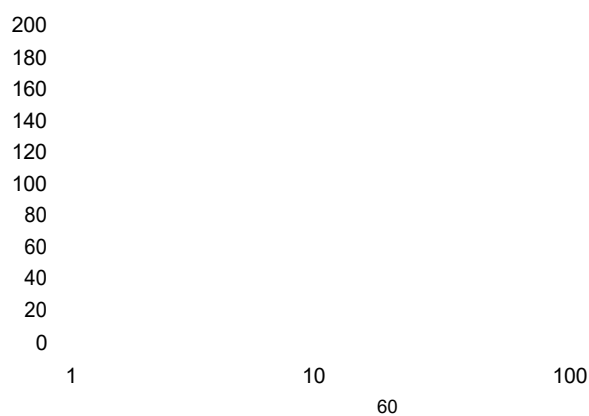

7 F & D V H 7 & H P S

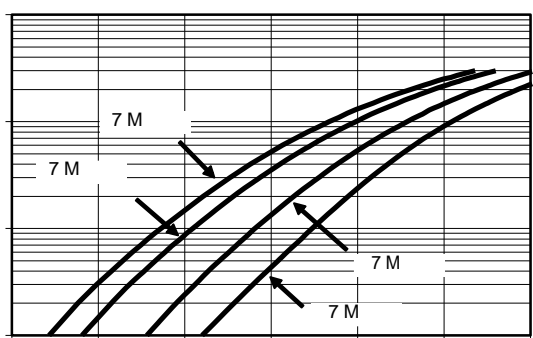

7 Q p € F ` D H ` D H H € 0 7


---

**PACKAGE OUTLINE DIMENSIONS**




0DUNLQJ ,QIRUPDWLRQ

&DWKRGH



\$QRGH


73URGXFW PRGH  
83'& LQIRUPDWLRQ



3DFNDJLQJ ,QIRUPDWLRQ

,QVLGH %R[

2XWVLGH %R[

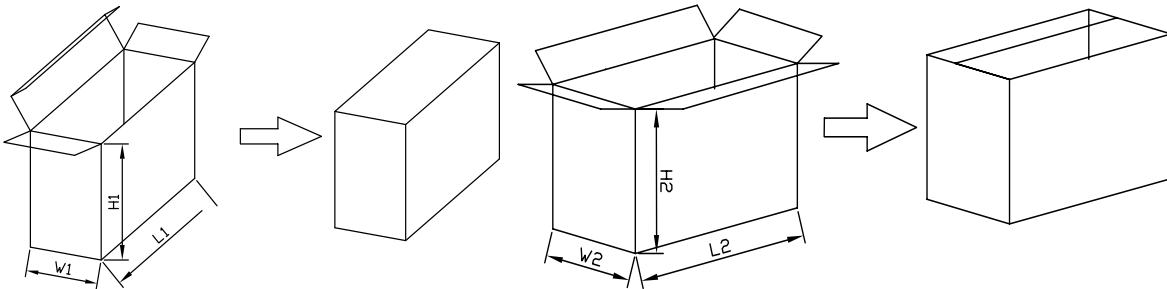

3DFNDJLQJ ,QIRUPDWLRQ

12	81,	,QVLGH %R[			2XWVLGH %R[		
		/	:	+	/	:	+
6L]H	PP						