



76\$ 9

129

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD
TSA 9



Cathode Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVHV
- ‡ +LJHILFLHQF\ RSHUDWLRQ
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHS SOLHV
- ‡)UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXSHVSHUNYHYURQWDJH		9550		9
0D[LXPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUHQW VLQDQHQZDYH VXSHULP&QDCHVRS&GLRGH		,) 60		\$
2SHUDMXQ&DQWRUDJH WHPSHUDW		X0H767°C	JH WR	f &
7\SLF&CHUPDO USHVUVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRDUG SHGLRGH	,) \$	7- f&	7 < 3	0\$;
	,) \$	7- f&		
	,) \$	7- f&		
	,) \$	7- f&		
,QVWDQWDQHRXUUSHCHVRS UDWHYHYURQWDJH	7- f&	,5		X\$
	7- f&			P\$



1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOVH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES 7\$

QVVRWUZVHRWG

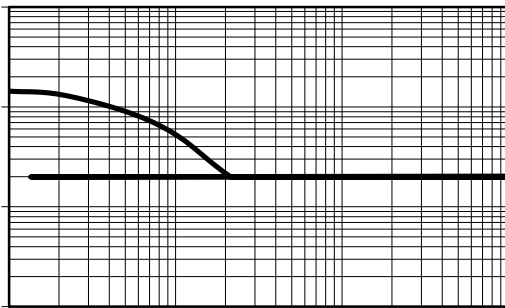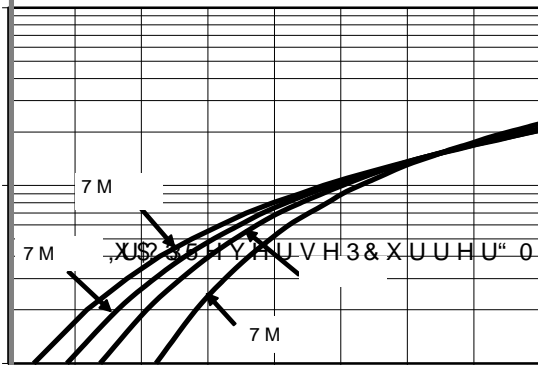


76\$ 9 5HY

:RUOG ,QWH&JKLDCMDFRLQDHO

76\$ 9

PACKAGE OUTLINE DIMENSIONS


DO-201AD

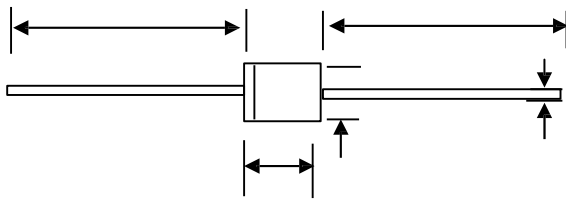


				C	
				1.4	
				1.1	
				5.1	

ODUNLQJ ,QIRUPDWLRQ

73URGXFW PQRGH
83' & LQIRUPDWLRQ




\$QRGH

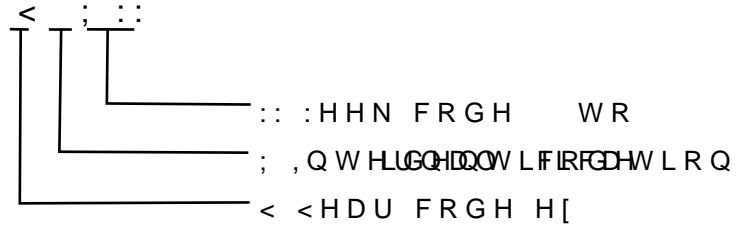

DWU] b [' =bZcf aUh] cb

% =bg] XY 6cl

&' G hgl XY 6cl

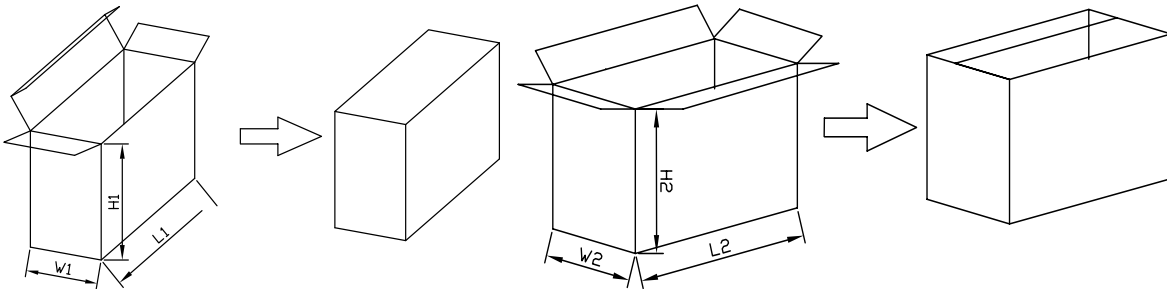

DWU] b [' =bZcf aUh] cb

BC	I B=H	% =bg] XY 6cl			&' G hgl XY 6cl		
G] nY	aa	@%	K%	<%	@&	K&	<&
ÛVŸ	ÛÔÙ	Û { æ ^ • ç } æ & \ æ * ^ É F € € € Û Ô Ù Þ & æ ! c [} Á	F € € € € Û Ô Ù Þ & æ ! c [} É F € à [ç ^ • á } Á c [ç æ]				
P [c ^	V [^ i æ } & ^	m G € { { É t H { { L	G F € F € € { { É t í { { L	F € F € í € € { { É t F € { {			