


7UHQFK 026 %DUULHU 6FKRWWN\ 5H

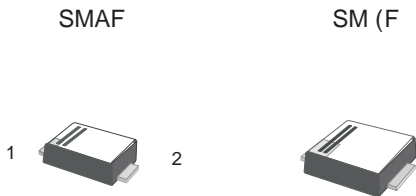

Features

- ‡ \$YDFG WUHQFK WHFKQRORJ\
- ‡/RZIRUZDUG YROWDJH GURS
- ‡/RZSRZHU ORVVHV
- ‡ +LJK HIILFLHQF\ RSHUDWLRQ
- ‡/HDG)UHH)LQLVK 5R+6 &RPSOLDQV

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & \$GDSWRUV

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)


3DUDPHWHU		6\PER	/LPLW	8QL
0D[L P XPHSHVSHUNYHYURQHW DJH		9550		9
0D[L P XPHYHU DRJHZ DWG WFLXUWHG QW		,) \$9		\$
3HDNRUZDYGFMUUHQW LQKDI VLQD YVXSHULPBRUDHVRSGGLRGH		,)60		\$
2SHUDMXQEDVQRUDHPSHUDDQJH		7- 767*	WR	&
7\SLFDICHUFDVQVSHDQFRGH ORXQWGS 3&%		5\$-1		f & :
, QVWDQWBQZKQW	,) \$	7- f &	7 < 3	0 \$;
	,) \$	7- f &		
, QVWDQWDRXVSHGWRG DWDWHG HYURQHW DJH	7- f &	,5		X \$
	7- f &			P \$

1RWHV


3XOWHVVWVSXOZLHG WKGXW\F

3XOWHVVXOZLHG KPV


RATINGS AND CHARACTERISTICS CURVES

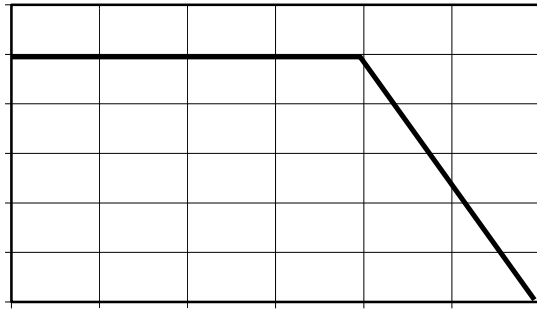

7F & DVH 7&HPS

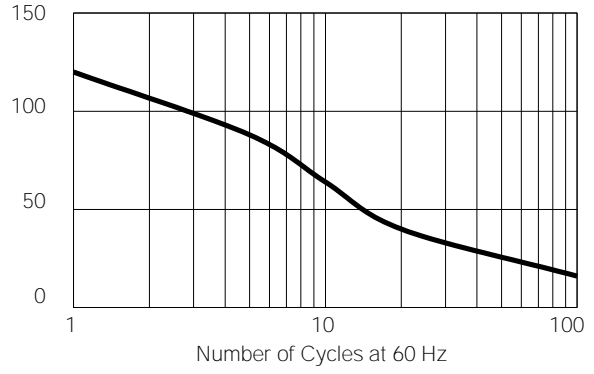


X\$

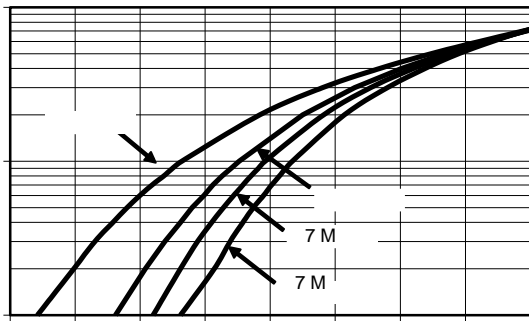


91 , QVWDQWDQ HFRXOW)DRJHZ DRJGG

X\$
 & XUUHQW
 , U 5HYHUVH & 9ROWDJH

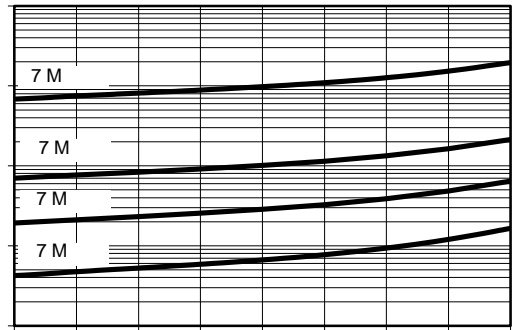


95 5HYHUVH 9ROWDJH 9ROWV

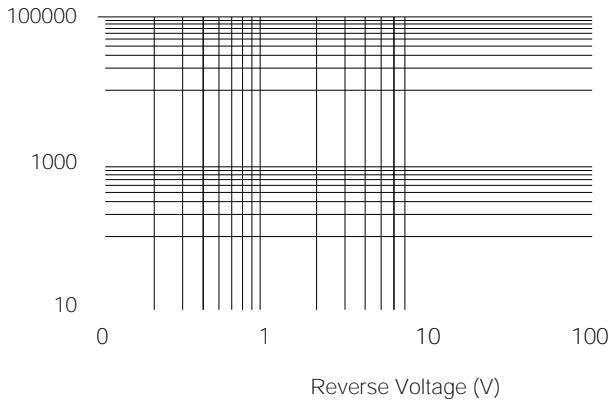

763 6 \$) %) 5HY

PACKAGE OUTLINE

SMBF

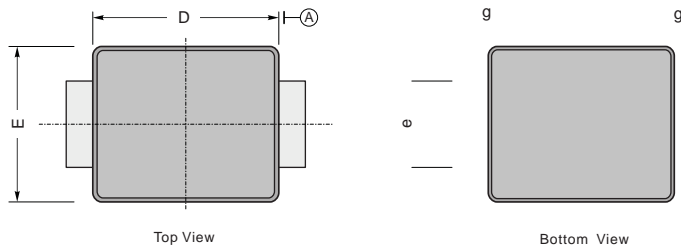

UNIT		A	C	D	E	H _E	e	g	
mm	max	1.3	0.26	4.4	3.7	5.5	2.2	1.0	9°
	min	1.1	0.18	4.2	3.5	5.1	1.9		
mil	max								
	min								