
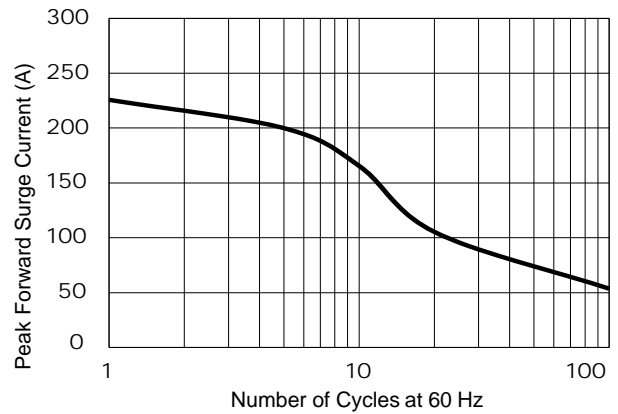




RATINGS AND CHARACTERISTICS CURVES

f & X Q O H V Q R W K B U Z L V H

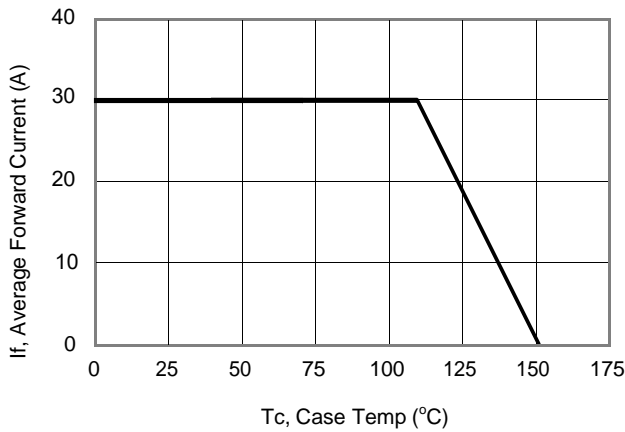

Current Derating, Case


Maximum Repetitive Surge Current

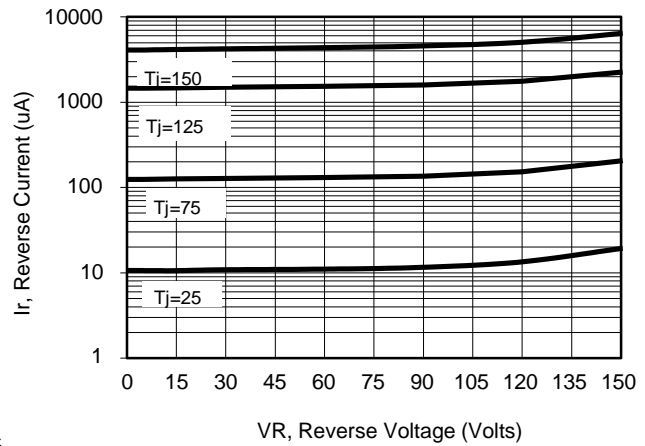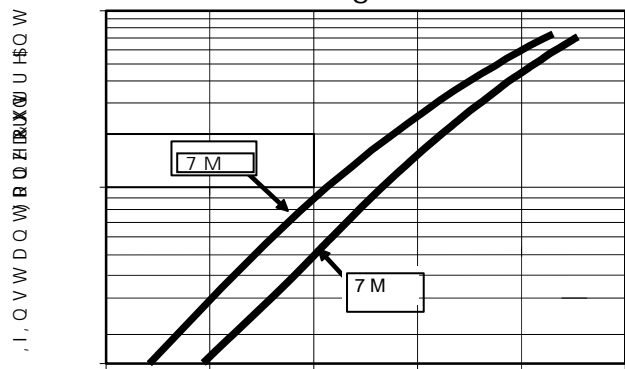

9 I, Q V W D Q W D Q H R R O W B Q H D U G


d Ç %o&] } (EoAs } (E š P

Typical Reverse Current

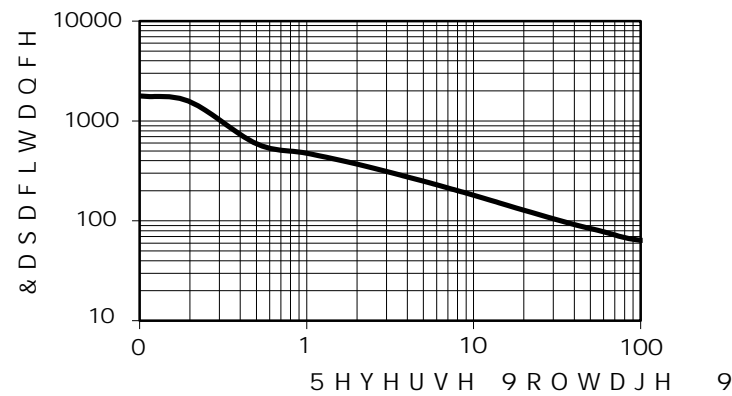


Typical Junction Capacitance


PACKAGE OUTLINE DIMENSIONS

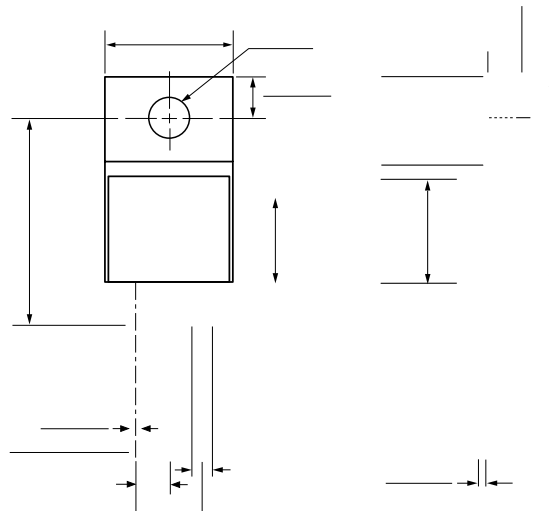

Marking Information

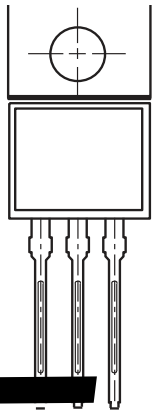


3URGXFW 765 GHQ&7RU 76/5 &7)
3'& LQIRUPDWLRQ

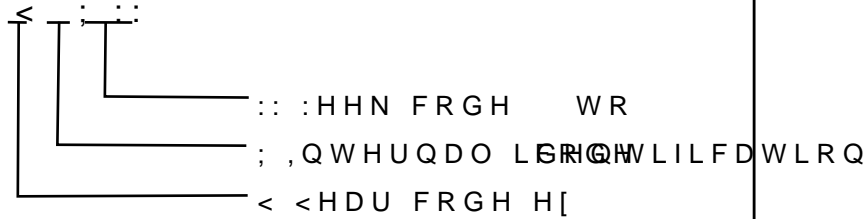

Packaging Information

7XEH 'LPHQVLRQV

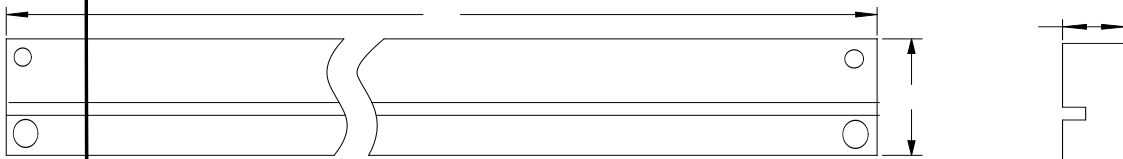

,QVLGH %R[

2XWVLGH %R[

Packaging Information

12	8	7XEH 'LPHQVLRQV			,QVLGH %R[2XWVLGH %R[
		\$	%	&	/	:	+	/	:	+
6LH	PP									
47<	3&6	3&6 7XEH			6PDO SHFWDJH3&6 WXE VRWDO			3&6 FDUERGLWRWDO		
1RWH		7ROHUDQFH PP" PP			PP" PP			PP" PP		