


7 UHQFK 026 %DUULHU 6FKRWWN\ 5H


TO-220AB
TSR / CT



ITO-220AB
TSR / CTF

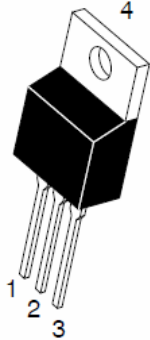

2SDEI&6I)0v D2.Nefla,S%HOVã\$#aU Lt2™ 0



Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDYGWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW

Applications

- ‡ '&' &RQYHUWHUV
- ‡ \$&'&GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡)UHHZKH'HLRQJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU	6\PERO	/LPLW	8QLW
0D[LPXPHSHVSHUNYHYURQHW DJH	9550		9
0D[LPXPHYUDRZH ZDUG UFXJWHHJWG	GHYLFH SHGLRGH	,) \$9	\$
3HDN IRVZDUEBUUHQW VLKDOHQH ZDYH VXSHULPSRVHGRFSCGUDRCHG	,)60		\$


!P œ!—Rq 2™p2Q 659g%oD”
Tã%\$0,Æ€FD%G(3C%-FD659)C%-10p2Z6D659•0)3u,% ñ 659•CEãq33 q ñ 6590•%o Å“2 XBQi cc59•CE\$tu3 q

1RWHV

3XOVH WHWWSXOVH ZLGWK GXW\ F\FOH


3XOVH WHVW 3XOVH ZLGWK 0 PV

RATINGS AND CHARACTERISTICS CURVES 7\$ f& XQOHVQRWKBUZLVH

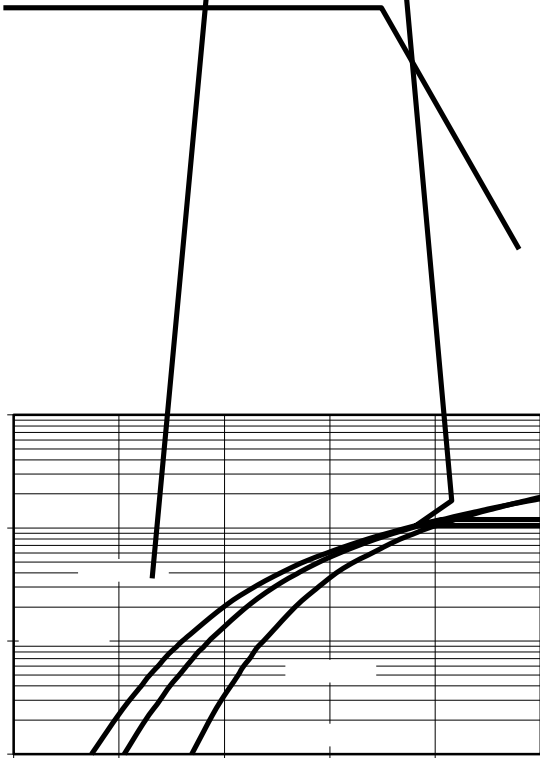


PACKAGE OUTLINE DIMENSIONS


810

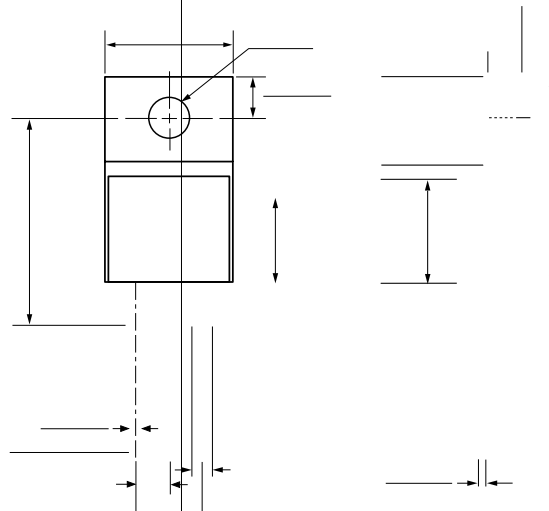

0DUNLQJ ,QIRUPDWLRQ

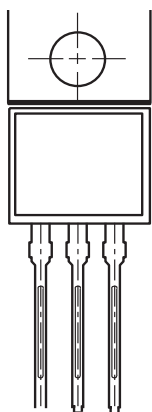


7 : &RPSDQ\ V WUDGHPDUN
 8 3URGXFW 765 &7) 7RU 765 &7)
 9 3' & LQIRUPDWLRQ

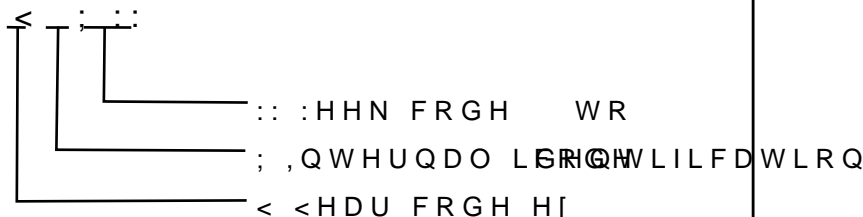

3DFNDJLQJ ,QIRUPDWLRQ

7XEH 'LPHQVLRQV

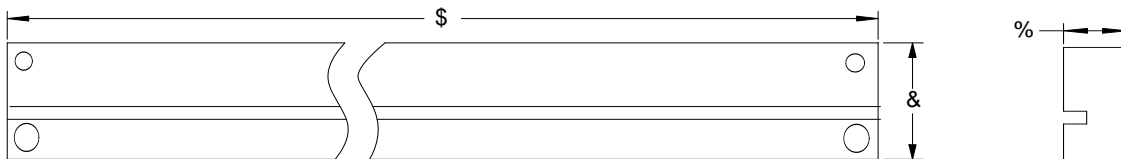

,QVLGH %R[

2XWVLGH %R[

3DFNDJLQJ ,QIRUPDWLRQ

12	81,	7XEH 'LPHQVLRQV			,QVLGH %R[2XWVLGH %R[
6LH	PP	\$	%	&	/	:	+	/	:	+
47<	3&6	3&6 7XEH			6PDO SHFWDJH3&6 WXEORWDO			3&6 FDUERGLWDO		
1RWH		7ROHUDQFH PP" PP			PP" PP			PP" PP		