


RATINGS AND CHARACTERISTICS CURVES


7\$

f & XQOHVQRWKBUZLVH

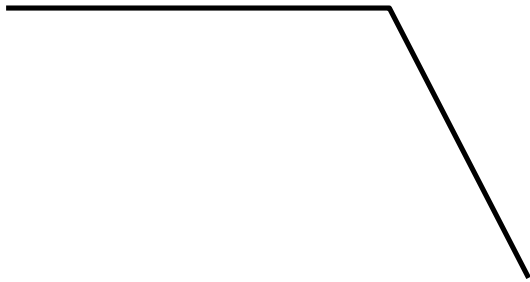

7F&DV7HPŠ&


Current Derating, Case

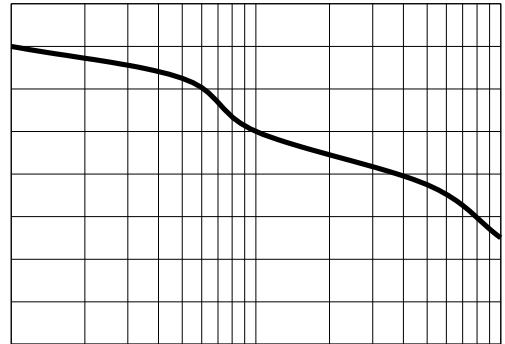

1 XPERR\F@HW+]

,U 5HYHUVH &XUUHQW X\$

Maximum Repetitive Surge Current

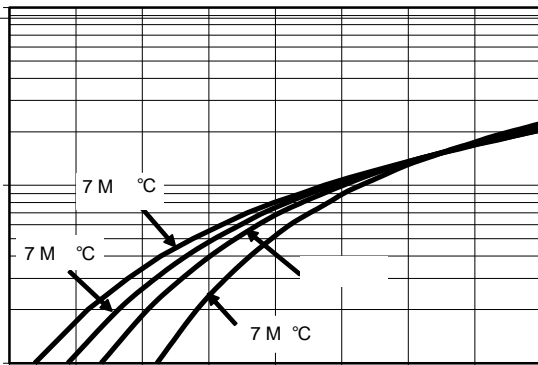


91 ,QVWDQWDQHRXV)RUJZDRUG

Typical Forward Voltage



95 5HYHUVH 9ROWDJH 9ROWV

Typical Reverse Current

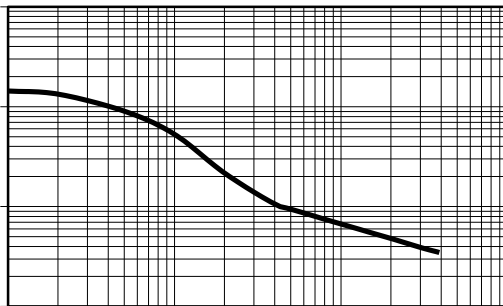


5HYHUVH 9ROWDJH 9

Typical Junction Capacitance


7M 7 M 7 M, I , Q V W D Q W D Q H R X V) R U Z D U

PACKAGE OUTLINE DIMENSIONS

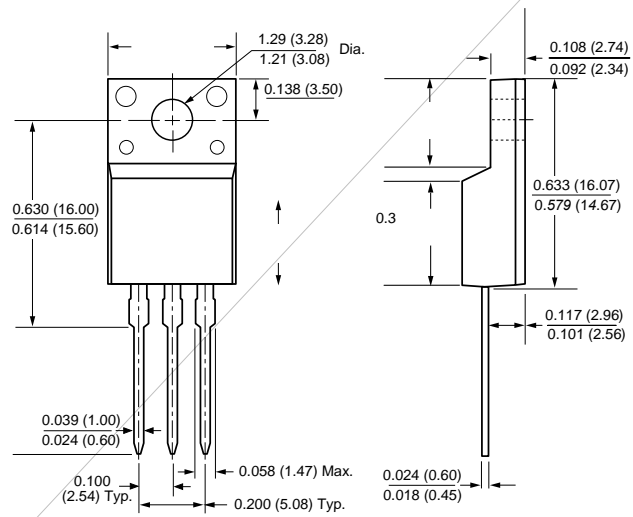


Marking Information

3URGXFW 765 / &7) 3' & LQIRUPDWLRQ

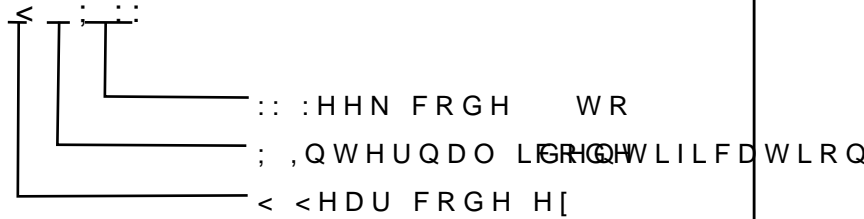

Packaging Information

7XEH 'LPHQVLRQV

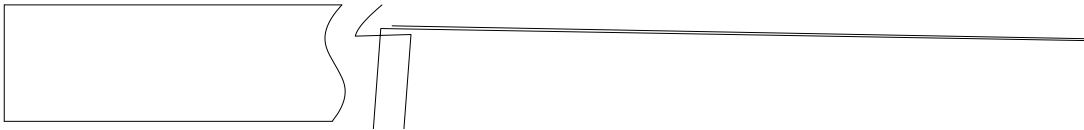

,QVLGH %R[

2XWVLGH %R[

Packaging Information

12	81,	7XEH 'LPHQVLRQV			,QVLGH %R[2XWVLGH %R[
6L]H	PP	\$	%		/	:	+	/	:	+
47<	3&6	3&6 7XEH			6PDOO SHFW DJH 3&6 WXEH WRWDO			3&6 FDUERQ WRWDO		
1RWH		7ROHUDQFH PP" PP			PP" PP			PP" PP		